Fermann UK

Create Value
For Customers



HEIGHT ADJUSTABLE DESK FRAME

PRODUCT CATALOGUE





HEIGHT ADJUSTABLE DESK FRAME

TABLE OF CONTENTS

01 Product Advantages

03 ET114 Series

07 ET119 Series

11 ET123 Series

15 ET223 Series

25 Quick Installation Desk


27 Single Motor

29 Dual Motor

39 Benching

43 Compact Table

Plan Your Workspace

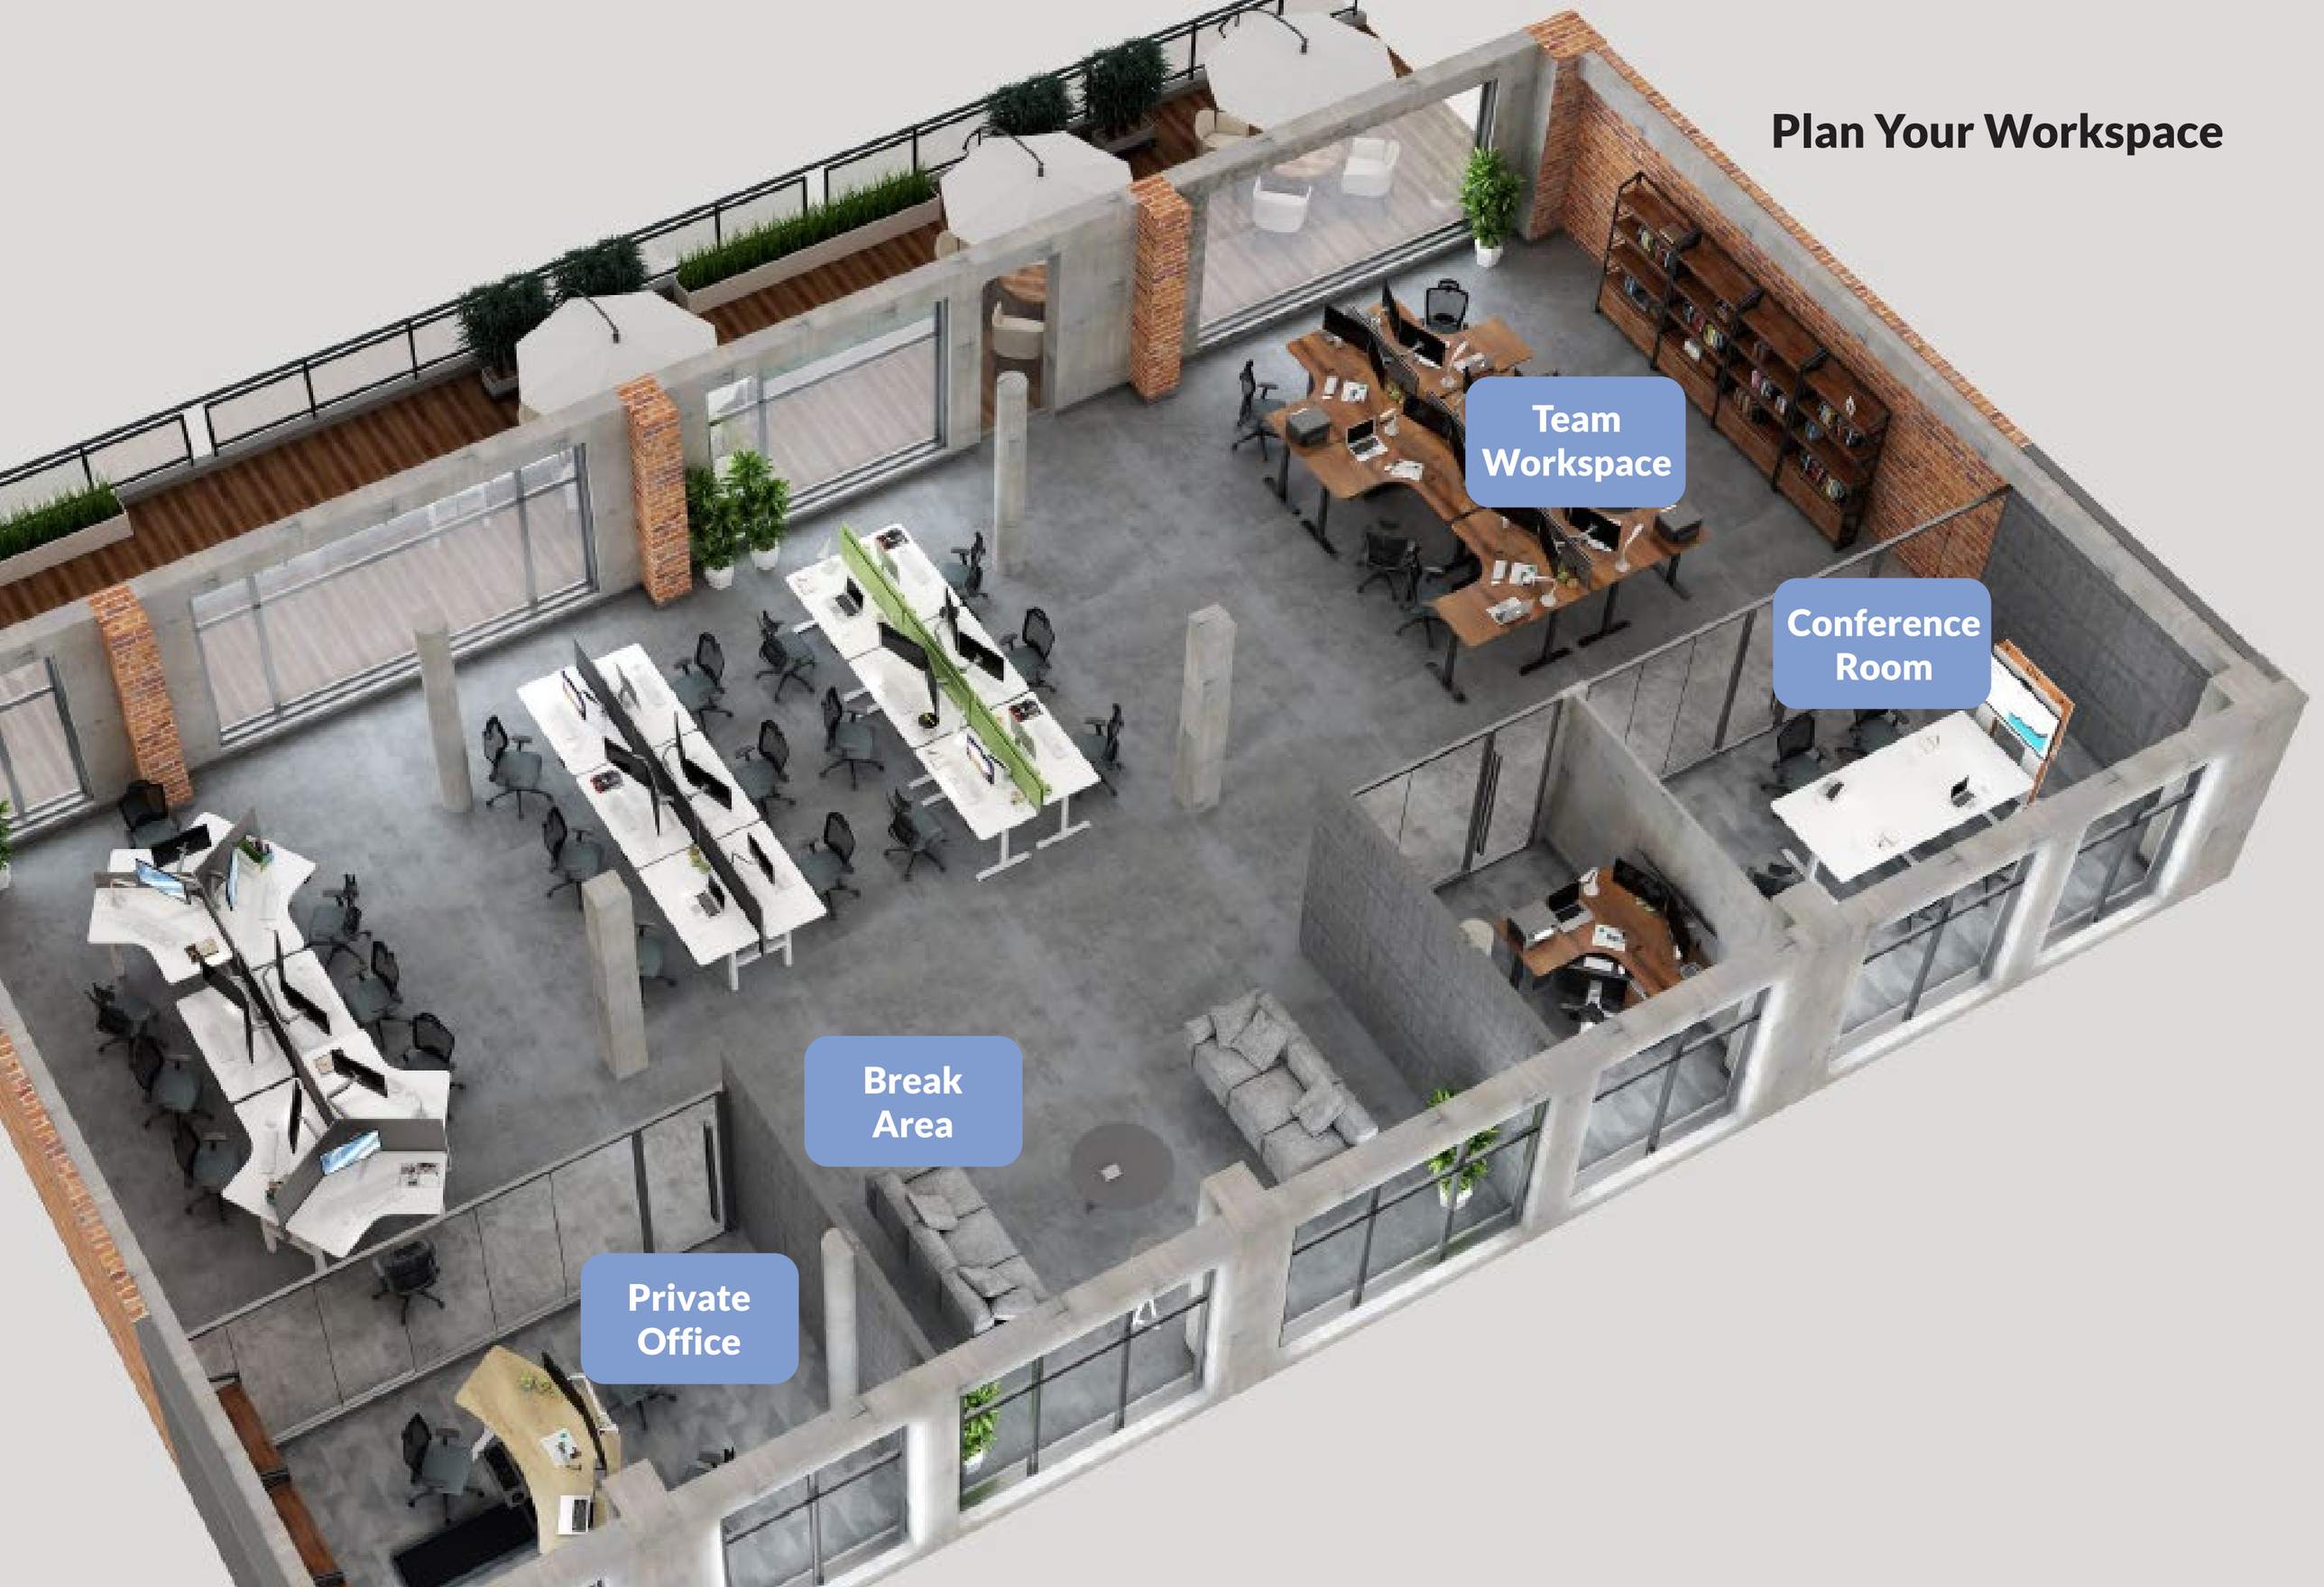

Height Adjustable Desk Collection



2-LEG
Rectilinear Worksurface



3-LEG
90° Worksurface



3-LEG
120° Worksurface



2-Desk Solution
Rectilinear Worksurface



3-Desk Solution
120° Worksurface



4-Desk Solution
Rectilinear Worksurface

Height Adjustable Desk Anatomy



*Above desk frame components can be freely matched

Product Advantages

Ergonomic Design

LoctekMotion height-adjustable desks enable users to switch from sit to stand effortlessly and encourage healthy movements throughout the day.

All In One Design

The package includes a tabletop and steel frame, easy for transportation & installation.
(Only for full desks)

Easy Adjustment

With the help of a handset or a crank, you can manage a quiet, fast, tool-free, and seamless adjustment according to your needs.

Aesthetic Design

Stylish and unique, the height adjustable desk can be easily incorporated into any office or home environment.

Powerful Motor

Powerful motor technology enables powerful yet smooth height adjustments.

Open-Architecture Design

The open-architecture design offers optimum and spacious knee space, providing sufficient place to stretch legs.

Solid Frame

Designed for maximum structural integrity, our frame features double steel tubing that ensures stability even at its highest height.

Durable Surface

Our standing desks are protected with thicker and more durable powder coating to resist scratches, water, and stains.

Low Noise Level

Ultra-silent operation enables the noise level lower than 50 dB.

Enhanced Anti-Collision Technology

It can detect any forces in the opposite direction of the desk's movement, and if these forces exceed a certain amount, the desk will automatically stop and reverse.


Fermann UK

ET114 Series

Height Adjustable Desk Frame



ET114E-N




Economical Model Single Motor




Model	ET114E-N
Max. Load Capacity	154lbs/70kg
Speed	25mm/s
Height Range	28.0"-47.6"/710-1210mm
Stroke	19.7"/500mm
Power	100V-240V
Frame Color	□ ▢ ■




Two-Button Handset
Easy to adjust the desk height with up/down button.

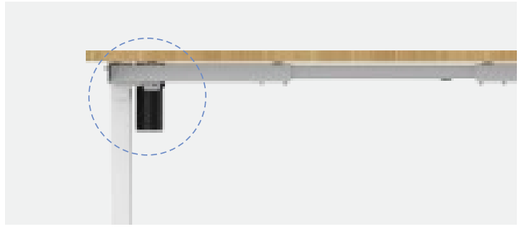

Single Motor
It enables powerful yet smooth and precise electric lifting ability.

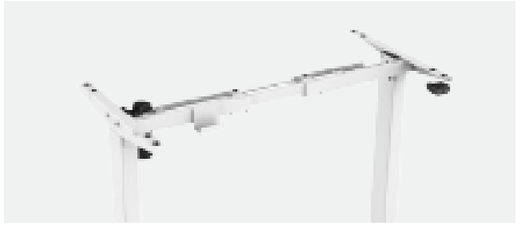

Enhanced Stability
Beam optimization enables the desk frame to become more stable even at its highest point.

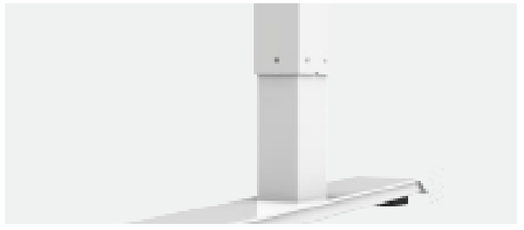

Durable
Thicker and more durable powder coating seamless surface can resist scratches, water, and stains.

Fermann UK

ET114 Series


ET114-KZ01

43.3"-63.0"
1000-1600mm
23.6"-31.5"
600-800mm

Quick Installation | Single Motor



Model	ET114-KZ01
Max. Load Capacity	154lbs/70kg
Speed	25mm/s
Height Range	28.0"-47.6"/710-1210mm
Stroke	19.7"/500mm
Power	100V-240V
Frame Color	□ ▢ ■

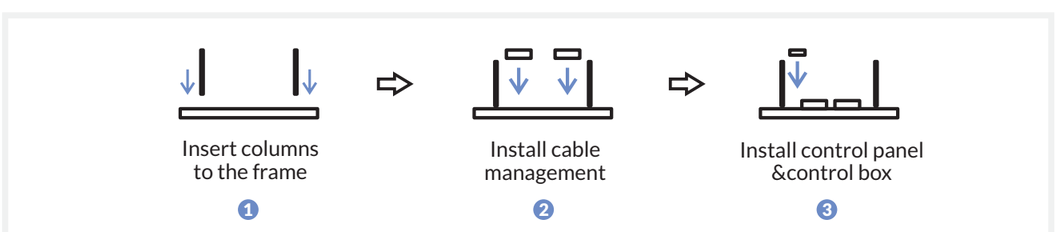

Pre-Assembled Design
Assembles easily in under 5 minutes.



Embedded Cable Tray
Cable tray is embedded in the product to help deal with cables.




2-Stage Column Design
It ensures smooth and precise electric lifting ability.

ET114-K14070

55.1"
1400mm
27.6"
700mm

Pre-Assembled Design | Full Desk | Single Motor

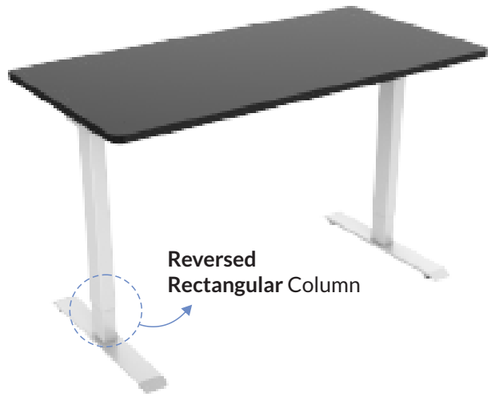

Model	ET114-K14070
Max. Load Capacity	121lbs/55kg
Speed	25mm/s
Height Range	28.9"-48.6"/735-1235mm
Stroke	19.7"/500mm
Desktop Material	Particle board
Power	100V-240V
Frame Color	□ ▢ ■

ET114-N

43.3"-63.0"
1000-1600mm
19.7"-31.5"
500-800mm

Beam Reinforcement | Single Motor



Model	ET114-N
Max. Load Capacity	154lbs/70kg
Speed	25mm/s
Height Range	28.0"-47.6"/710-1210mm
Stroke	19.7"/500mm
Power	100V-240V
Frame Color	□ ▢ ■

Fermann UK


ET119 Series


Height Adjustable Desk Frame



ET119

Full Desk | Single Motor | 4 Programmable Memory Presets



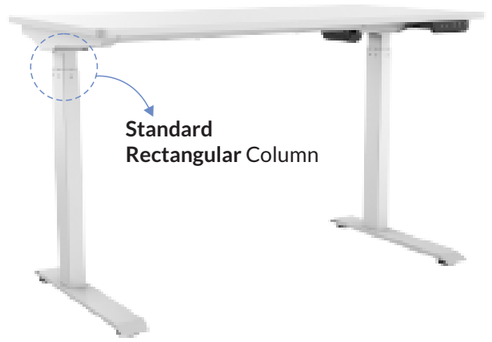

Model	ET119
Max. Load Capacity	110lbs/50kg
Speed	25mm/s
Height Range	28.7"-48.4"/730-1230mm
Stroke	19.7"/500mm
Desktop Material	Particle board
Power	100V-240V
Frame Color	□ ▢ ■



Quick Installation
Assemble easily in less than 5 minutes.



Enhanced Anti-Collision Technology
Automatically reverse if it encounters an unexpected obstacle.



Everything in One Box
Easy for installation and transportation.




C-Leg Structure
Maximum leg room for users.


Fermann UK

ET119 Series

ET119-BB

Ergonomic Shape Bamboo Desktop | Anti-Collision System



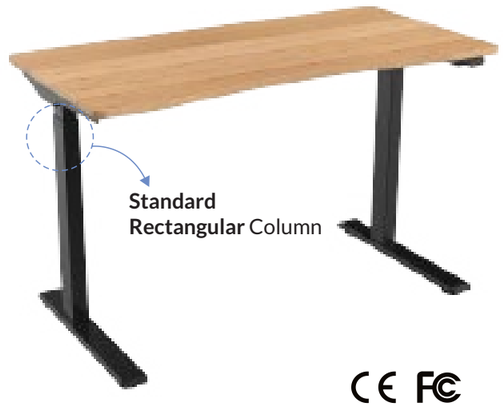



Model	ET119-BB
Max. Load Capacity	110lbs/50kg
Speed	25mm/s
Height Range	28.7"-48.4"/730-1230mm
Stroke	19.7"/500mm
Desktop Material	Bamboo board
Power	100V-240V
Frame Color	□ ▢ ■

Eco-Friendly | CO2 Neutral | Renewable Resources | Healthy

ET119E

Full Desk | Single Motor | Two-Button design




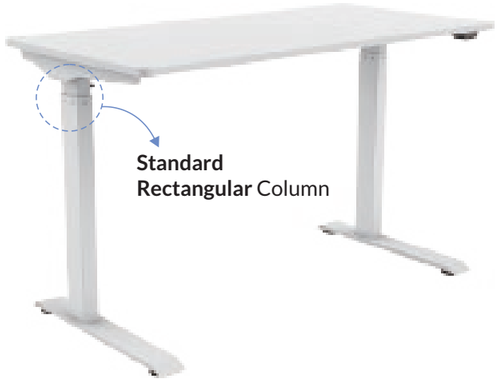

Model	ET119E
Max. Load Capacity	110lbs/50kg
Speed	25mm/s
Height Range	28.7"-48.4"/730-1230mm
Stroke	19.7"/500mm
Desktop Material	Particle board
Power	100V-240V
Frame Color	□ ▢ ■

ET119W-C

Wooden Tabletop | 4 Programmable Setting | USB charging





Model	ET119W-C
Max. Load Capacity	99lbs/45kg
Speed	25mm/s
Height Range	28.3"-48.0"/720-1220mm
Stroke	19.7"/500mm
Desktop Material	Particle board
Power	100V-240V
Frame Color	□ ▢ ■



Smart Control Pad
Memory Position x 4, USB Type-A x1, USB Type-C x1.



Quick Installation
Only 3 steps & 12 screws are needed, with no extra complicated assembly.



Storage Drawer
Offer plenty of room for your setup.



Anti-Collision System
Prevent your desk from suffering material damage.

Fermann UK


ET123 Series


Height Adjustable Desk Frame



ET123(IB)

Dual Motor | Holeless Frame | Ease of Maintenance




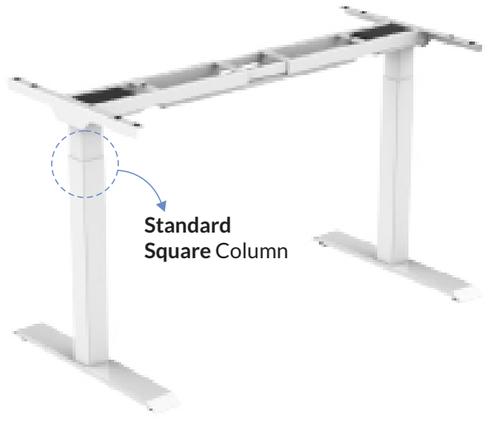

Model	ET123(IB)
Max. Load Capacity	220lbs/100kg
Speed	32mm/s
Height Range	27.2"-46.5"/690-1180mm
Stroke	19.3"/490mm
Power	100V-240V
Frame Color	□ ▨ ■

ET123A

Dual Beam | 1A Drop Test Standard | Economical Model





Model	ET123A
Max. Load Capacity	220lbs/100kg
Speed	32mm/s
Height Range	27.2"-46.5"/690-1180mm
Stroke	19.3"/490mm
Power	100V-240V
Frame Color	□ ▨ ■


Fermann UK

ET123 Series

ET123(IB)-KZ01

47.2"-63.0"
1200-1600mm
23.6"-31.5"
600-800mm


Tool Free | 0.1W Standby Power | Ease of Maintenance

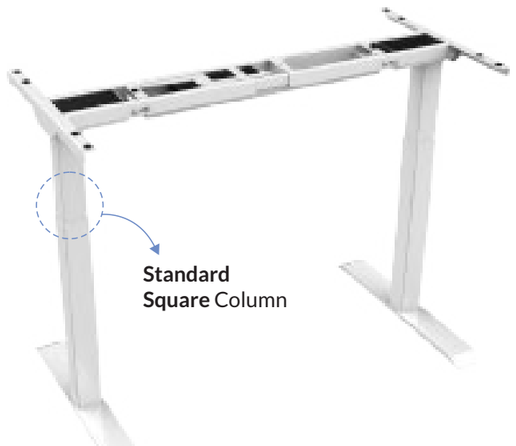

Model	ET123(IB)-KZ01
Max. Load Capacity	220lbs/100kg
Speed	32mm/s
Height Range	27.2"-46.5"/690-1180mm
Stroke	19.3"/490mm
Power	100V-240V
Frame Color	□ ▢ ■



Tool-Free Installation
No tools are required. Assembles easily in less than 5 minutes.

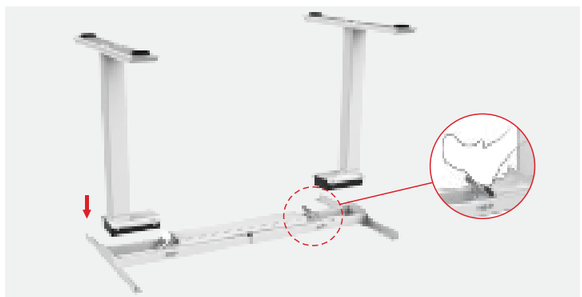


Buckle Design
Step on the buckle with your feet to install the column, easy and time-saving.

ET123E

47.2"-70.9"
1200-1800mm
23.6"-31.5"
600-800mm

Single Beam | 1A Drop Test Standard | Economical Model

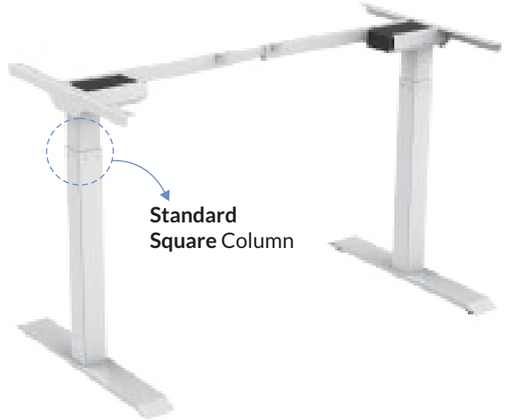


Model	ET123E
Max. Load Capacity	220lbs/100kg
Speed	32mm/s
Height Range	27.2"-46.5"/690-1180mm
Stroke	19.3"/490mm
Power	100V-240V
Frame Color	□ ▢ ■

ET123H(IB)

47.2"-78.7"
1200-2000mm
23.6"-31.5"
600-800mm

Dual Benching | 4 Lifting Columns

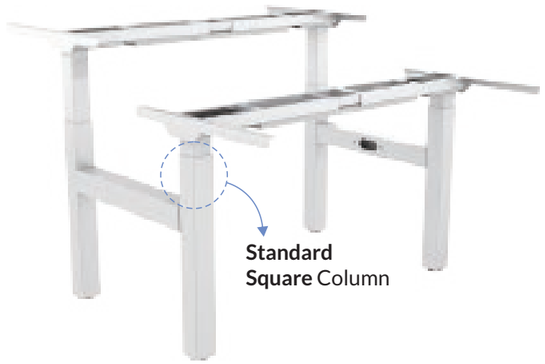

Model	ET123H(IB)
Max. Load Capacity	220lbs/100kg
Speed	32mm/s
Height Range	27.2"-46.5"/690-1180mm
Stroke	19.3"/490mm
Power	100V-240V
Frame Color	□ ▢ ■

Fermann UK

ET223 Series

Height Adjustable Desk Frame




ET223(IB)

47.2"-78.7"
1200-2000mm

23.6"-31.5"
600-800mm

Dual Motor | Anti-Collision System | Ease of Maintenance

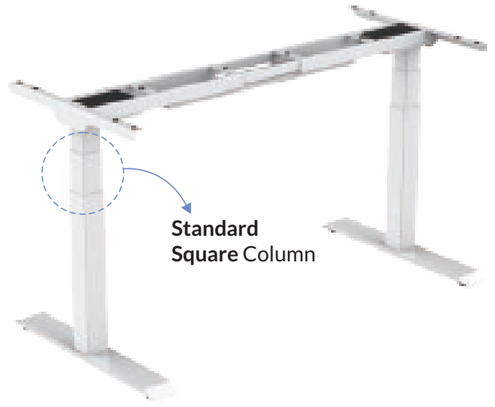

Model	ET223(IB)
Max. Load Capacity	275lbs/125kg
Speed	38mm/s
Height Range	22.8"-48.4"/580-1230mm
Stroke	25.6"/650mm
Power	100V-240V
Frame Color	□ ▢ ■


CE FC CB BIFMA EN527 cULus

ET223(IB)-ZZ1407

55.1"
1400mm

27.6"
700mm

Foldable | Quick Installation | Full Desk

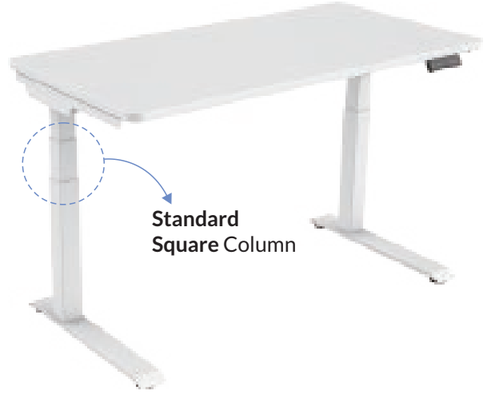


Model	ET223(IB)-ZZ1407
Max. Load Capacity	176lbs/80kg
Speed	38mm/s
Height Range	24.0"-49.6"/610-1260mm
Stroke	25.6"/650mm
Desktop Material	Particle board
Power	100V-240V
Frame Color	□ ▢ ■

CB CE FC cULus


Fermann UK

ET223 Series

ET223A(IB)




Hole Design | 1A Drop Test Standard | Economical Model

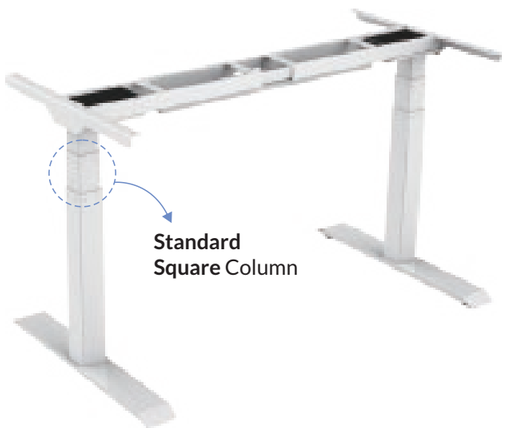


Model	ET223A(IB)
Max. Load Capacity	275lbs/125kg
Speed	38mm/s
Height Range	22.8"-48.4"/580-1230mm
Stroke	25.6"/650mm
Power	100V-240V
Frame Color	□ ▒ ■

ET223DL




Suitable for L-shaped tabletop | Ease of Maintenance

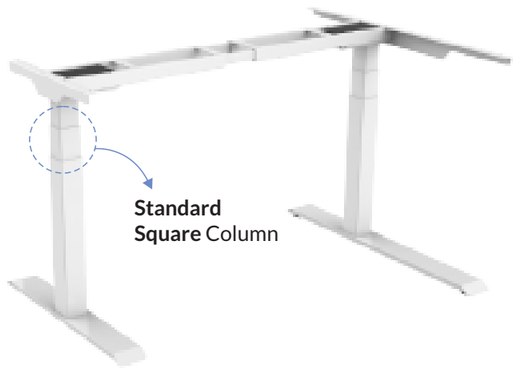


Model	ET223DL
Max. Load Capacity	275lbs/125kg
Speed	38mm/s
Height Range	22.8"-48.4"/580-1230mm
Stroke	25.6"/650mm
Power	100V-240V
Frame Color	□ ▒ ■

ET223D(IB)




Separation Control | Large Worksurface | Dual Motor

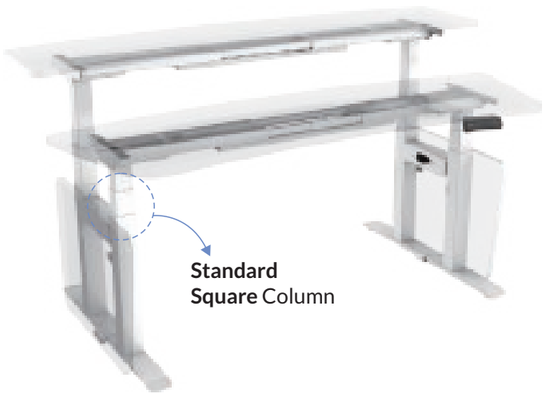


Model	ET223D(IB)
Max. Load Capacity	275lbs/125kg
Speed	38mm/s
Height Range	23.6"-49.2"/600-1250mm
Stroke	25.6"/650mm
Power	100V-240V
Frame Color	□ ▒ ■

ET223E



Single Beam | 1A Drop Test Standard | Economical Model

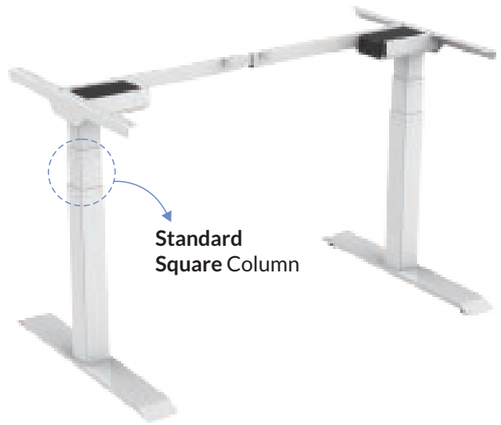


Model	ET223E
Max. Load Capacity	275lbs/125kg
Speed	38mm/s
Height Range	22.8"-48.4"/580-1230mm
Stroke	25.6"/650mm
Power	100V-240V
Frame Color	□ ▒ ■


Fermann UK

ET223 Series

ET223H(IB)

Dual Benching | Anti-Collision System | Functional



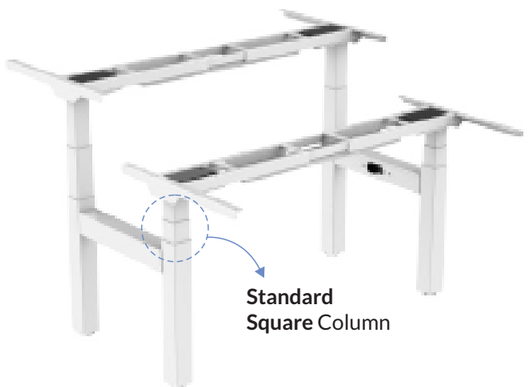


Model	ET223H(IB)
Max. Load Capacity	275lbs/125kg
Speed	38mm/s
Height Range	22.8"-48.4"/580-1230mm
Stroke	25.6"/650mm
Power	100V-240V
Frame Color	□ ▢ ■



Dual benching unit
Enable two individual workspace.




Enhanced Anti-Collision Technology
Prevent your desk from suffering material damage.

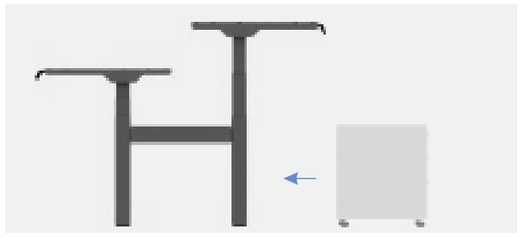

Columns Set Backward
Provide more under-desk area.

ET223H(IB)-BZ

Columns Set Backward | Dual Benching | C-Leg Design







Model	ET223H(IB)-BZ
Max. Load Capacity	275lbs/125kg
Speed	38mm/s
Height Range	23.6"-49.2"/600-1250mm
Stroke	25.6"/650mm
Power	100V-240V
Frame Color	□ ▢ ■

ET223V(IB)

Triple Motor | 120° Frame | Corner Use



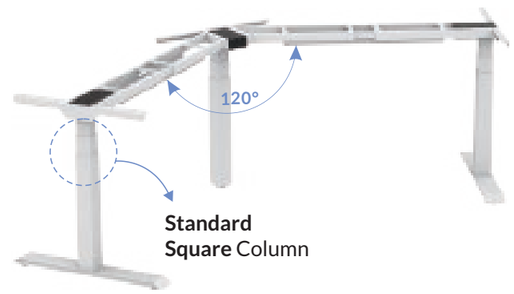



Model	ET223V(IB)
Max. Load Capacity	330lbs/150kg
Speed	38mm/s
Height Range	22.8"-48.4"/580-1230mm
Stroke	25.6"/650mm
Power	100V-127V/200V-240V
Frame Color	□ ▢ ■

ET223 Series

ET223V(IB)-BZ

Columns Set Backward | 120° Frame | C-Leg Design




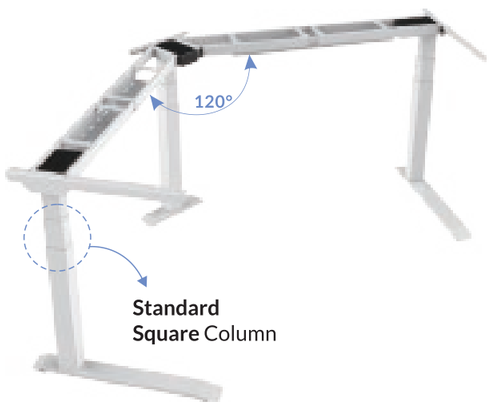


Model	ET223V(IB)-BZ
Max. Load Capacity	330lbs/150kg
Speed	38mm/s
Height Range	23.6"-49.2"/600-1250mm
Stroke	25.6"/650mm
Power	100V-127V/200V-240V
Frame Color	□ ▒ ■

ET223Y(IB)

Three Working Station | Four Motors | Six Columns




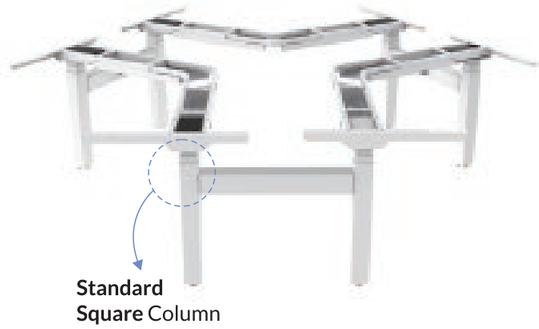


Model	ET223Y(IB)
Max. Load Capacity	220lbs/100kg
Speed	38mm/s
Height Range	22.8"-48.4"/580-1230mm
Stroke	25.6"/650mm
Power	100V-240V
Frame Color	□ ▒ ■

ET223Q

Four Motors | Four Columns




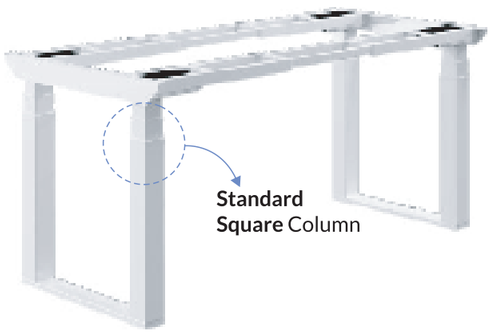


Model	ET223Q
Max. Load Capacity	441lbs/200kg
Speed	38mm/s
Height Range	23.8"-49.4"/605-1255mm
Stroke	25.6"/650mm
Power	100V-240V
Frame Color	□ ■

ET223Y(IB)-BZ

Columns Set Backward | Three Working Station | C-Leg Design



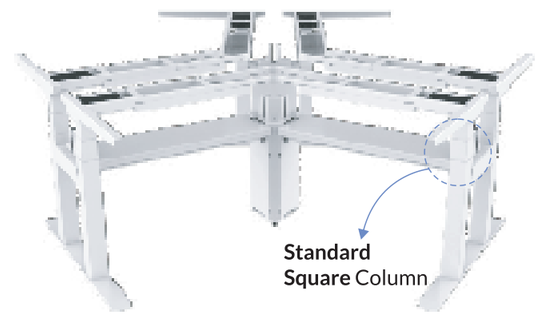


Model	ET223Y(IB)-BZ
Max. Load Capacity	220lbs/100kg
Speed	38mm/s
Height Range	23.6"-49.2"/600-1250mm
Stroke	25.6"/650mm
Power	100V-240V
Frame Color	□ ▒ ■


Fermann UK

ET223 Series

ET223ZL

Suitable for Small L Shape Desktop




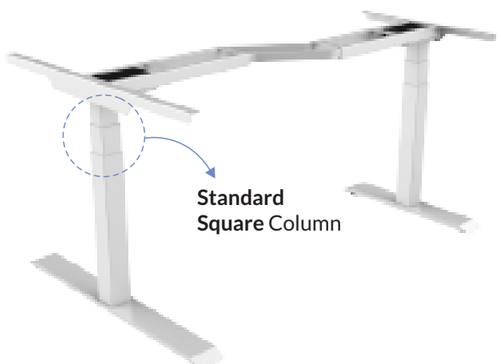

Model	ET223ZL
Max. Load Capacity	275lbs/125kg
Speed	38mm/s
Height Range	22.8"-48.4"/580-1230mm
Stroke	25.6"/650mm
Power	100V-240V
Frame Color	□ ▒ ■


ET223T(IB)

Triple Motor Large Worksurface Three-In-One Design

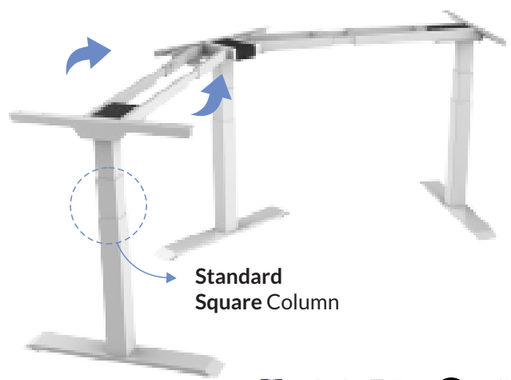

It can be arranged in a variety of shapes among L-shape, V-shape, and I-shape at will to suit users' preferences.




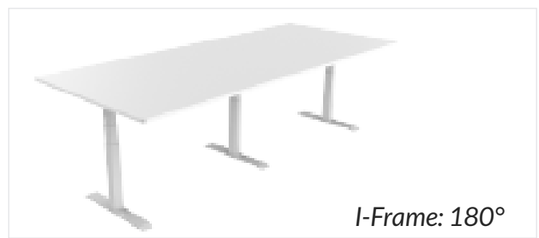




ET223R(IB)

Synchronous Adjustment Large Worksurface



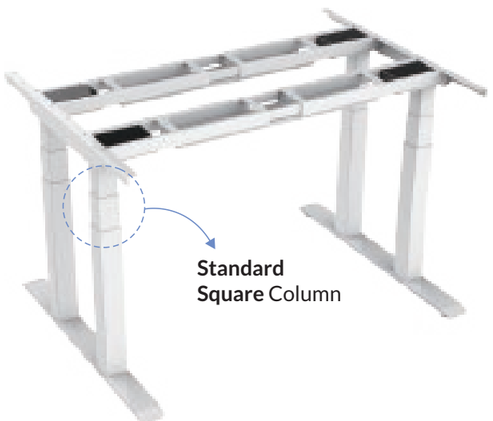

Model	ET223R(IB)
Max. Load Capacity	441lbs/200kg
Speed	38mm/s
Height Range	23.6"-49.2"/600-1250mm
Stroke	25.6"/650mm
Power	100V-240V
Frame Color	□ ▒ ■

Model	ET223T(IB)	Recommended Tabletop Dimensions
Max. Load Capacity	330lbs/150kg	**90°** : 51.2"-74.8"/1300-1900mm, (2 sides)
Speed	38mm/s	23.6"-31.5"/600-800mm
Height Range	22.8"-48.4"/580-1230mm	**120°**: 43.3"-70.9"/1100-1800mm,
Stroke	25.6"/650mm	23.6"-31.5"/600-800mm
Power	100V-127V/200V-240V	**180°**: 66.9"-114.2"/1700-2900mm,
Frame Color	□ ▒ ■	23.6"-39.4"/600-1000mm

Fermann UK


Quick Installation Desk

Height Adjustable Desk Frame



ET260-4824-KZ

Quick Installation Dual Motor 2-Stage






Model	ET260-4824-KZ
Max. Load Capacity	198lbs/90kg
Speed	25mm/s
Height Range	28.3"-47.6"/720-1210mm
Stroke	19.3"/490mm
Desktop Material	Particle board
Power	100V-240V
Frame Color	☐

ET365-4824-KZ

Quick Installation Dual Motor Anti-Collision System






Model	ET365-4824-KZ
Max. Load Capacity	198lbs/90kg
Speed	25mm/s
Height Range	24.4"-50.0"/620-1270mm
Stroke	25.6"/650mm
Desktop Material	Particle board
Power	100V-240V
Frame Color	☐

Fermann UK

Single Motor

ET118W-N

USB Charging | Storage Drawer | Solid construction







Model	ET118W-N
Max. Load Capacity	110lbs/50kg
Speed	25mm/s
Height Range	28.3"-47.6"/720-1210mm
Stroke	19.3"/490mm
Desktop Material	Particle board
Power	100V-240V
Frame Color	□ ▢ ■

ET115E-N

Economical Model | Holeless Design | Single Motor



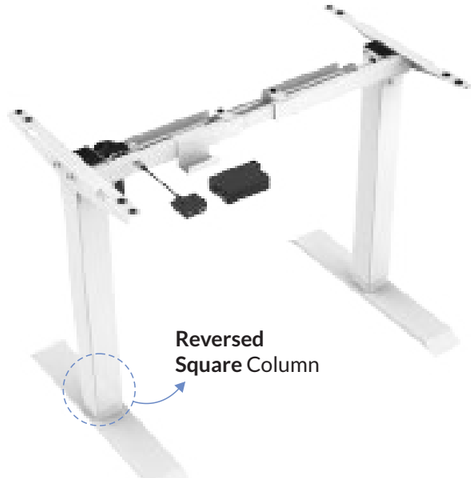

Model	ET115E-N
Max. Load Capacity	154lbs/70kg
Speed	25mm/s
Height Range	27.4"-46.5"/695-1180mm
Stroke	19.1"/485mm
Power	100V-240V
Frame Color	□ ▢ ■



Smart Control Pad
Four memory positions for child & adult operation.




Integrated Output Ports
USB Type-A x2, USB Type-C x1



Storage Drawer
Offer plenty of room for your setup.



Anti-Collision System
Prevent your desk from suffering material damage.

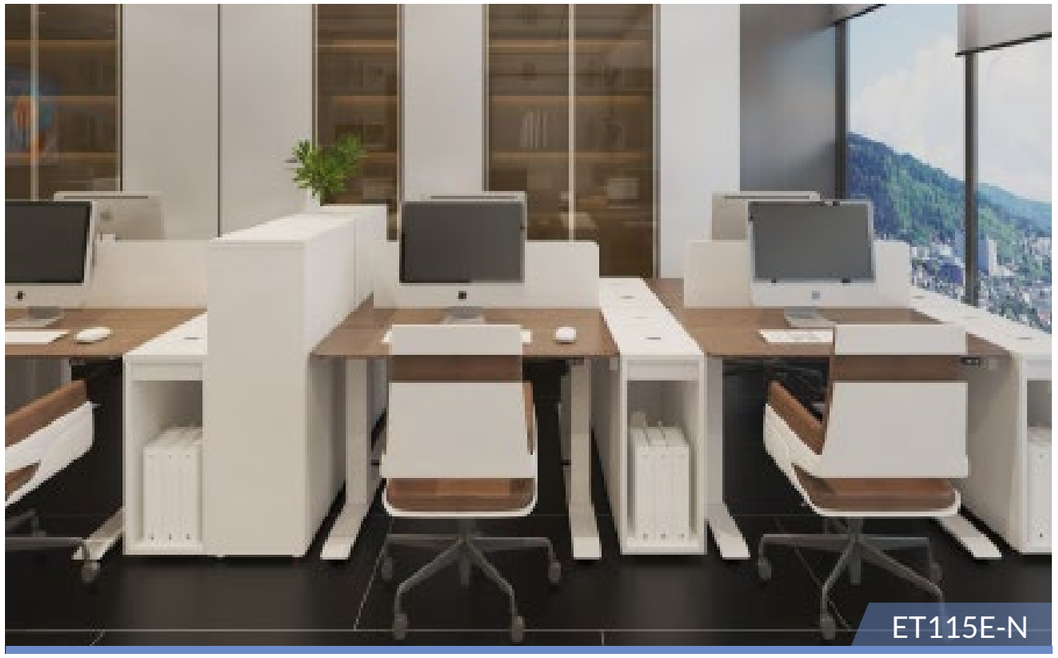


Fermann UK

Dual Motor

Height Adjustable Desk Frame



ET121(IB)




Ease of Maintenance | Holeless Design | Dual Motor



Model	ET121(IB)
Max. Load Capacity	220lbs/100kg
Speed	32mm/s
Height Range	27.2"-46.5"/690-1180mm
Stroke	19.3"/490mm
Power	100V-240V
Frame Color	□ ▢ ■

ET122(IB)



Holeless Design | Dual Motor | Enhanced Column




Model	ET122(IB)
Max. Load Capacity	220lbs/100kg
Speed	32mm/s
Height Range	28.0"-47.2"/710-1200mm
Stroke	19.3"/490mm
Power	100V-240V
Frame Color	□ ▢ ■

Dual Motor

ET124(IB)

Holeless Design | Dual Motor | 2-Stage






Model	ET124(IB)
Max. Load Capacity	220lbs/100kg
Speed	32mm/s
Height Range	28.0"-47.2"/710-1200mm
Stroke	19.3"/490mm
Power	100V-240V
Frame Color	□ ▢ ■

ET125(IB)

Holeless Design | Dual Motor | 2-Stage







Model	ET125(IB)
Max. Load Capacity	220lbs/100kg
Speed	32mm/s
Height Range	28.0"-47.2"/710-1200mm
Stroke	19.3"/490mm
Power	100V-240V
Frame Color	□ ▢ ■

ET126(IB)

Holeless Design | Dual Motor | 2-Stage




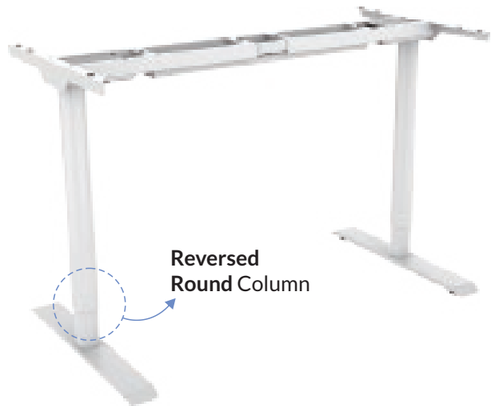


Model	ET126(IB)
Max. Load Capacity	220lbs/100kg
Speed	32mm/s
Height Range	28.0"-47.2"/710-1200mm
Stroke	19.3"/490mm
Power	100V-240V
Frame Color	□ ▢ ■

ET127(IB)

Holeless Design | Dual Motor | Enhanced Column



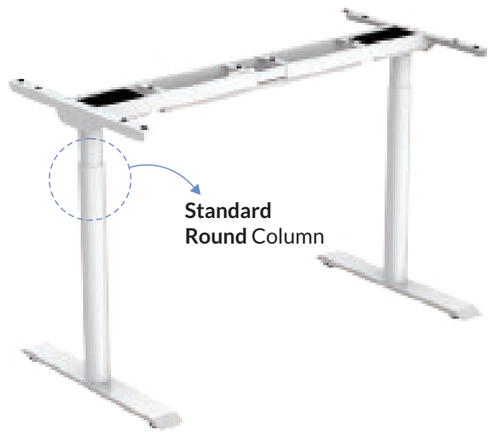


Model	ET127(IB)
Max. Load Capacity	220lbs/100kg
Speed	32mm/s
Height Range	28.0"-47.2"/710-1200mm
Stroke	19.3"/490mm
Power	100V-240V
Frame Color	□ ▢ ■

Dual Motor

ET224(IB)

Holeless Design | Dual Motor | 3-Stage







Model	ET224(IB)
Max. Load Capacity	275lbs/125kg
Speed	38mm/s
Height Range	23.6"-49.2"/600-1250mm
Stroke	25.6"/650mm
Power	100V-240V
Frame Color	□ ▢ ■

ET227(IB)

Holeless Design | Dual Motor | 3-Stage



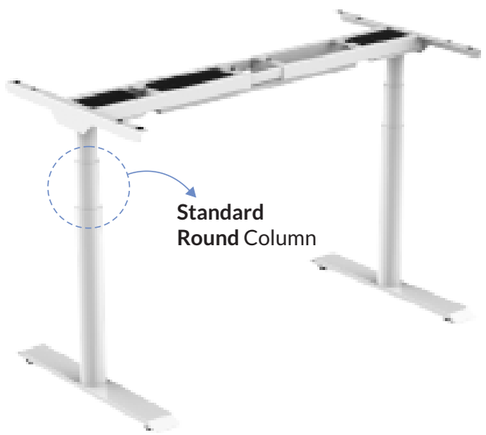


Model	ET227(IB)
Max. Load Capacity	275lbs/125kg
Speed	38mm/s
Height Range	23.6"-49.2"/600-1250mm
Stroke	25.6"/650mm
Power	100V-240V
Frame Color	□ ▢ ■

ET225 Series

ET225E

Economical Model | Ease of Maintenance | Dual Motor






Model	ET225E
Max. Load Capacity	220lbs/100kg
Speed	35mm/s
Height Range	24.4"-50.0"/620-1270mm
Stroke	25.6"/650mm
Power	100V-240V
Frame Color	□ ▢ ■

ET225(IB)

Holeless Design | Dual Motor | 3-Stage





Model	ET225(IB)
Max. Load Capacity	275lbs/125kg
Speed	38mm/s
Height Range	23.6"-49.2"/600-1250mm
Stroke	25.6"/650mm
Power	100V-240V
Frame Color	□ ▢ ■

Dual Motor

ET260

47.2"- 70.9"
1200-1800mm
23.6"-31.5"
600-800mm

Dual Motor | 2-Stage




Model	ET260
Max. Load Capacity	220lbs/100kg
Speed	25mm/s
Height Range	27.4"-46.7"/695-1185mm
Stroke	19.3"/490mm
Power	100V-240V
Frame Color	□ ▢ ■

ET268

47.2"- 70.9"
1200-1800mm
23.6"-31.5"
600-800mm

Dual Motor | 2-Stage

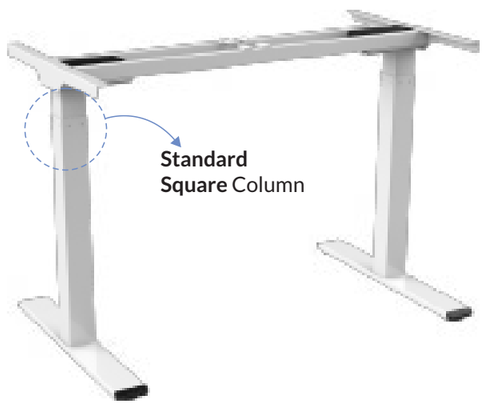


Model	ET268
Max. Load Capacity	220lbs/100kg
Speed	32mm/s
Height Range	28.0"-47.2"/710-1200mm
Stroke	19.3"/490mm
Power	100V-240V
Frame Color	□ ▢ ■

ET228 Series

ET228(IB)

47.2"-78.7"
1200-2000mm
23.6"-31.5"
600-800mm

Holeless Design | Enhanced Column | Dual Motor

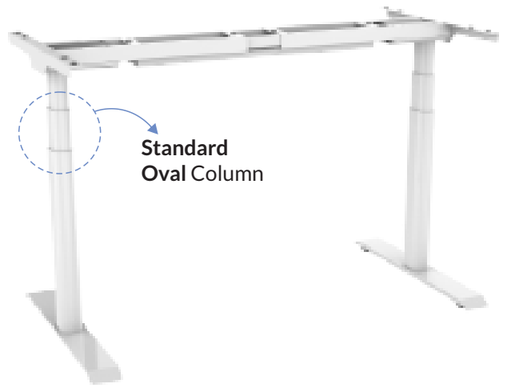


Model	ET228(IB)
Max. Load Capacity	275lbs/125kg
Speed	38mm/s
Height Range	23.6"-49.2"/600-1250mm
Stroke	25.6"/650mm
Power	100V-240V
Frame Color	□ ▢ ■

ETF228(IB)

55.0"
1400mm
28.0"
700mm

Bamboo Desktop | Dual Motor | 3-Stage

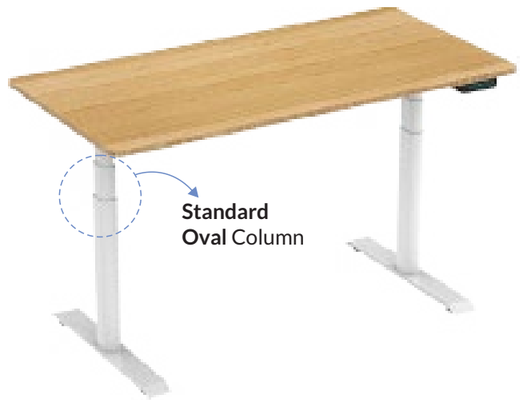

Model	ETF228(IB)
Max. Load Capacity	275lbs/125kg
Speed	38mm/s
Height Range	24.4"-50.0"/620-1270mm
Stroke	25.6"/650mm
Desktop Material	Bamboo board
Power	100V-240V
Frame Color	□ ▢ ■

Eco-Friendly
CO2 Neutral
Renewable Resources
Healthy


Fermann UK

Dual Motor

ET275

47.2"-70.9"
1200-1800mm
23.6"-31.5"
600-800mm

Economical Model | Ease of Maintenance | Dual Motor

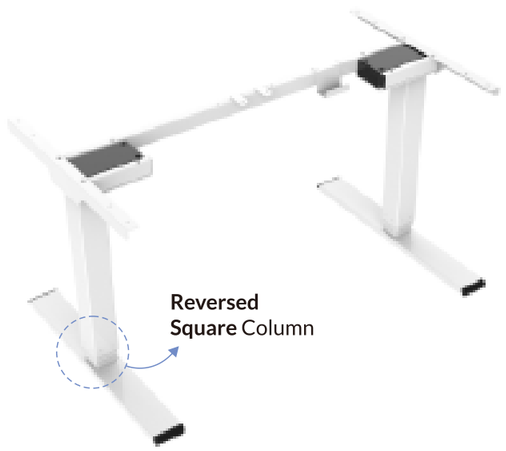


Model	ET275
Max. Load Capacity	220lbs/100kg
Speed	35mm/s
Height Range	24.4"-50.0"/620-1270mm
Stroke	25.6"/650mm
Power	100V-240V
Frame Color	□ ▢ ■



ET270(IB)

47.2"-78.7"
1200-2000mm
23.6"-31.5"
600-800mm

Magnetic Fabric Cord Covers | Ease of Maintenance

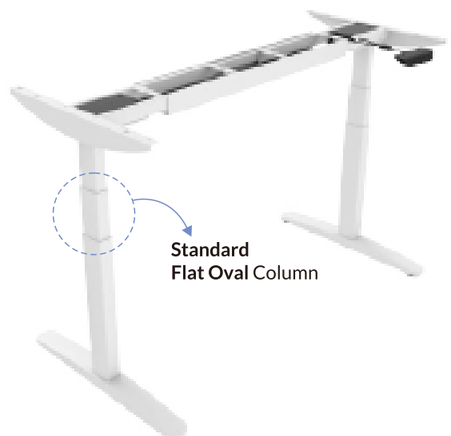

Model	ET270(IB)
Max. Load Capacity	275lbs/125kg
Speed	38mm/s
Height Range	22.8"-48.4"/580-1230mm
Stroke	25.6"/650mm
Power	100V-240V
Frame Color	□ ▢ ■

ET365

47.2"-70.9"
1200-1800mm
23.6"-31.5"
600-800mm

Economical Model | Ease of Maintenance | Dual Motor



Model	ET365
Max. Load Capacity	220lbs/100kg
Speed	25mm/s
Height Range	23.6"-49.2"/600-1250mm
Stroke	25.6"/650mm
Power	100V-240V
Frame Color	□ ▢ ■


Fermann UK

Benching


Height Adjustable Desk Frame



ET222H(IB)




Dual Benching Anti-Collision System

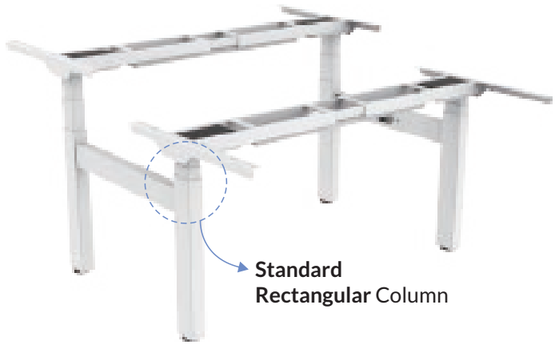


Model	ET222H(IB)
Max. Load Capacity	275lbs/125kg
Speed	38mm/s
Height Range	22.8"-48.4"/580-1230mm
Stroke	25.6"/650mm
Power	100V-240V
Frame Color	□ ▢ ■

ET227H(IB)



Dual Benching Anti-Collision System

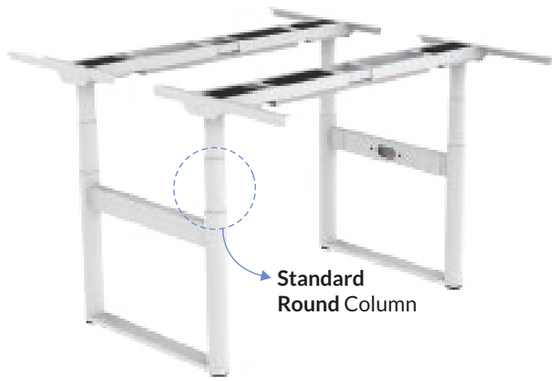


Model	ET227H(IB)
Max. Load Capacity	275lbs/125kg
Speed	38mm/s
Height Range	23.6"-49.2"/600-1250mm
Stroke	25.6"/650mm
Power	100V-240V
Frame Color	□ ▢ ■

Benching


ET261H

Dual Benching Anti-Collision System 2-Stage






Model	ET261H
Max. Load Capacity	220lbs/100kg
Speed	25mm/s
Height Range	27.2"-46.5"/690-1180mm
Stroke	19.3"/490mm
Power	100V-240V
Frame Color	□ ■

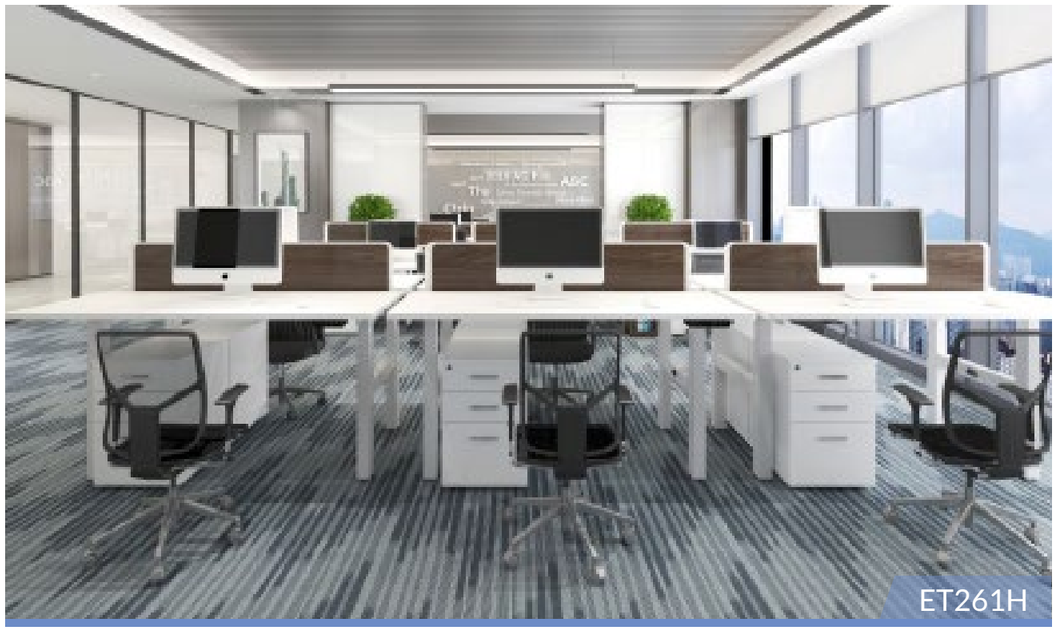
ET261H


ET366H

Dual Benching Anti-Collision System 3-Stage





Model	ET366H
Max. Load Capacity	220lbs/100kg
Speed	25mm/s
Height Range	22.8"-48.4"/580-1230mm
Stroke	25.6"/650mm
Power	100V-240V
Frame Color	□ ■

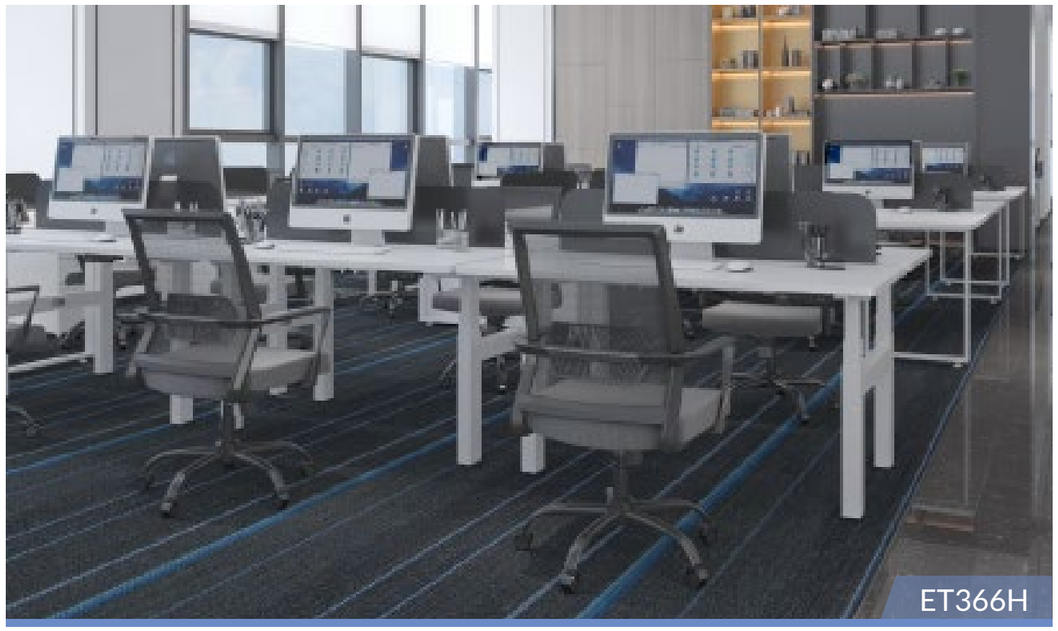

ET366H


Fermann UK

Compact Table

ET026-7040

Portable Offset Column | Hidden Casters



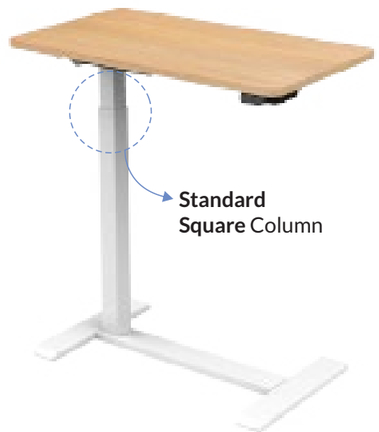

Model	ET026-7040
Max. Load Capacity	44lbs/20kg
Speed	30mm/s
Height Range	25.6"-40.6"/650-1030mm
Stroke	15.0"/380mm
Desktop Material	Particle board
Power	100V-240V
Frame Color	□ ▢ ■



Hidden Casters
Can be slid under sofa or bed as a portable side table.




Two Button Control
Adjust the desk height with ease.




C-Shaped Design
Provide more legroom.

ET028-LI

Compact Design | Locking Caters | Battery Version Optional




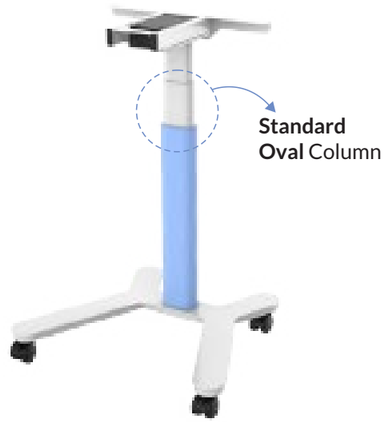

Model	ET028-LI
Max. Load Capacity	176lbs/80kg
Speed	38mm/s
Height Range	25.6"-51.2"/650-1300mm
Stroke	25.6"/650mm
Power	100V-240V
Frame Color	□ ▢ ■

MT026-7040

Mobile | Gas Spring | Hidden Casters | Offset Column





Model	MT026-7040
Max. Load Capacity	15lbs/7kg
Height Range	25.6"- 40.6"/650-1030mm
Stroke	15.0"/380mm
Desktop Material	Particle board
Frame Color	□ ■